


# Product Datasheet

## Table mounted powder coated stainless steel eye wash

LAB-85GS/T

Perfect for the laboratory environment both within industry and schools, this table mounted eye/face wash unit meets the requirements stipulated within the EN15154 and ANSI Z358.1-2014 standards. Where floor space is at a premium, this table mounted model provides a usable solution for employees at risk of contamination from accidental spillages.

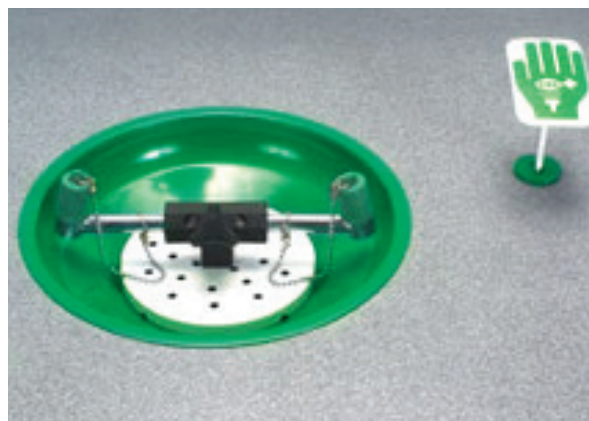

## Specifications

MATERIALS OF CONSTRUCTION	
BOWL/LID	Powder coated stainless steel
DIFFUSERS	Chrome plated brass retaining ring, stainless steel filter mesh, plastic body
PIPEWORK	Stainless steel
STANDARD FINISH	Green powder coated polyester finish
SERVICES	
WATER INLET	1/2" Female BSP
OPERATING PRESSURE	2.0 to 6 BAR G / 32 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	12 L per minute / 3 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
EYE/FACE WASH	Push plate (optional treadle foot control for hands free operation)
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	429mm (16.9in) x 300mm (11.8in) x 210mm (8.3in)
WEIGHT	3kg / 7lb

# General Arrangement Drawing

## Table mounted powder coated stainless steel eye wash

LAB-85GS/T

