


Product Datasheet

Over door mounted laboratory safety shower

LAB-23GS/OD

If space is an issue in the laboratory setting, the over door mounted safety shower with powder coated stainless steel pipework is a great choice. Providing resistance to corrosive and flammable materials the safety shower is quick to activate and offers a thorough decontamination. Designed to meet the requirements of the European Standard EN15154 for Laboratories and ANSI Z358.1-2014.

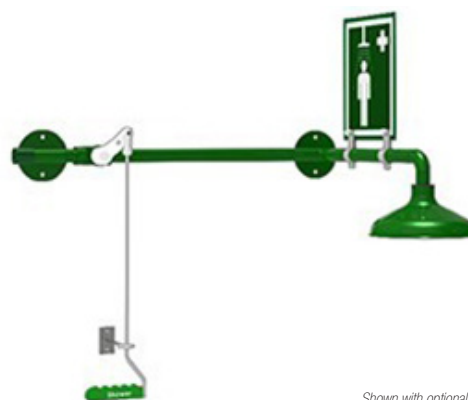

Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	Stainless steel
OPERATING VALVE	Stainless-steel
SHOWER ROSE	Powder coated stainless steel
STANDARD FINISH	Green powder coated polyester
SERVICES	
WATER INLET	1" female BSP
OPERATING PRESSURE	2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	76 L per minute / 20 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
SHOWER	Pull handle
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	950mm (37.4in) x 656mm (25.8in) x 230mm (9.1in)
WEIGHT	5kg (11lb)

General Arrangement Drawing

Over door mounted laboratory safety shower

LAB-23GS/OD

