


Product Datasheet

Over door mounted unheated safety shower

23GOD
23GSOD

Emergency safety shower designed specifically to mount above a door as a space saving option. Small on space, and big on functionality, this unheated safety shower provides a complete decontamination at a flow rate of 76 liters (20 US gal) per minute. Meets the requirements of ANSI Z358.1-2014.

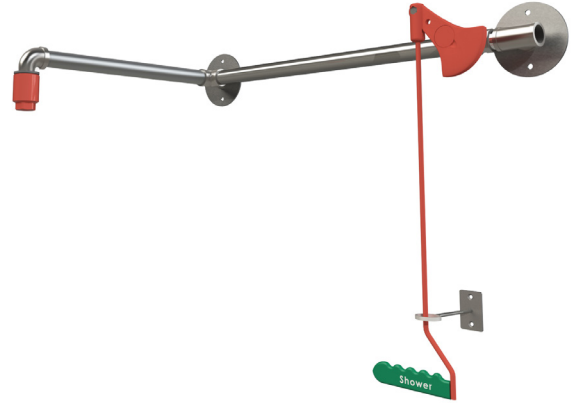

Specifications

| MATERIALS OF CONSTRUCTION | |
|-------------------------------|--|
| PIPEWORK & FITTINGS | Stainless steel (GS) or galvanized mild steel (G) |
| OPERATING VALVE | Stainless steel, full bore, stay open ball valve |
| SHOWER NOZZLE | Injection moulded nylon 6 |
| SERVICES | |
| WATER INLET | 1" male NPT |
| OPERATING PRESSURE | 2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve) |
| MINIMUM FLOW RATES | 76 L per minute / 20 US gal per minute |
| AMBIENT OPERATING TEMPERATURE | |
| MINIMUM | 5C / 41F |
| MAXIMUM | 35C / 95F |
| OPERATION | |
| SHOWER/BODY SPRAY | Pull handle |
| DIMENSIONS & WEIGHT | |
| DIMENSIONS (WxDxH) | 125mm (4.9in) x 770mm (30.3in) x 637mm (25in) |
| WEIGHT | 3kg (7lb) |

General Arrangement Drawing

Over door mounted unheated safety shower

23GOD

23GSOD

