


Product Datasheet

Over door mounted laboratory safety shower

L23GSOD

If space is an issue in the laboratory setting, the over door mounted safety shower with powder coated stainless steel pipework is a great choice. Providing resistance to corrosive and flammable materials the safety shower is quick to activate and offers a thorough decontamination. Designed to meet the requirements ANSI Z358.1-2014.

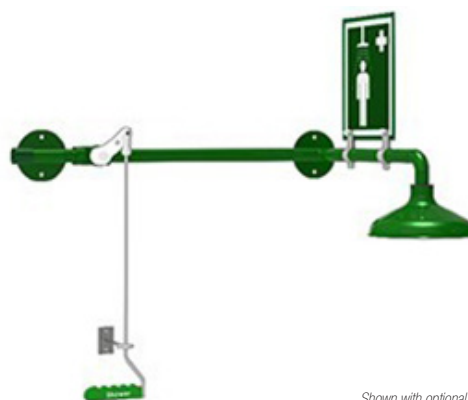

Shown with optional sign

Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	Stainless steel
OPERATING VALVE	Stainless-steel
SHOWER ROSE	Powder coated stainless steel
STANDARD FINISH	Green powder coated polyester
SERVICES	
WATER INLET	1" female NPT
OPERATING PRESSURE	2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
MINIMUM FLOW RATES	76 L per minute / 20 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
SHOWER	Pull handle
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	950mm (37.4in) x 656mm (25.8in) x 230mm (9.1in)
WEIGHT	5kg (11lb)

General Arrangement Drawing

Over door mounted laboratory safety shower

L23GSOD

