


Product Datasheet

Self-draining safety shower and stainless steel open bowl eye wash within a protective double frame

SD65GLV
SD65GS

The self-draining safety shower and eye/face wash are each housed in their own designated area within a stainless steel protective frame. For casualties negotiating their way to the shower, the hand rails provide extra support if necessary.

The self-draining feature allows standing water to drain from the standpipe to avoid it heating up and potentially scalding a user, an essential benefit for hot climates. Designed to meet ANSI Z358.1-2014 standards.

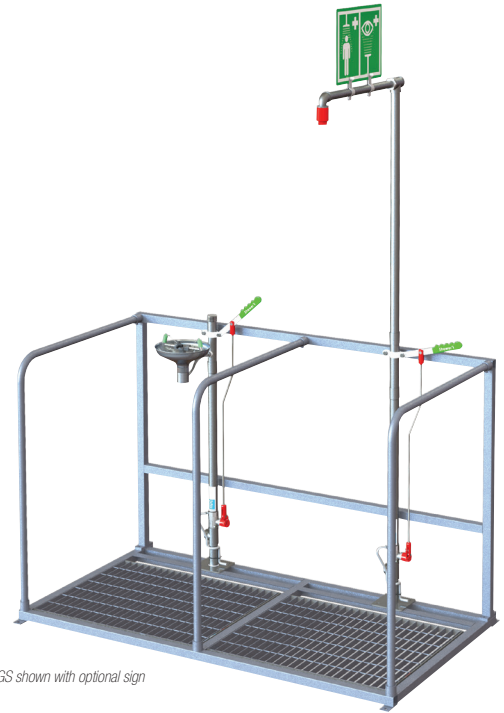

SD65GS shown with optional sign

Specifications

| MATERIALS OF CONSTRUCTION | |
|-------------------------------|--|
| PIPEWORK & FITTINGS | Stainless steel (GS) or galvanized mild steel (GLV) |
| FRAME | Stainless steel (GS) or galvanized mild steel (GLV) |
| OPERATING VALVE | Stainless steel, full bore, stay open ball valve |
| SHOWER NOZZLE | Injection moulded nylon 6 |
| EYE WASH BOWL | Stainless steel |
| EYE WASH DIFFUSERS | Chrome plated brass retaining ring, stainless steel filter mesh, plastic body |
| STANDARD FINISH | Polished brush (GS) or green powder coated (GLV) |
| SERVICES | |
| WATER INLET | 1 1/4" female NPT |
| OPERATING PRESSURE | 2 to 6 BAR G / 29 to 87 PSI (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve) |
| MINIMUM FLOW RATES | Shower: 76 L per minute / 20 US gal per minute Eye wash: 12 L per minute / 3 US gal per minute |
| AMBIENT OPERATING TEMPERATURE | |
| MINIMUM | 5C / 41F |
| MAXIMUM | 55C / 131F |
| OPERATION | |
| SHOWER | Push down lever |
| EYE WASH | Push down lever |
| DIMENSIONS & WEIGHT | |
| DIMENSIONS (WxDxH) | 1638mm (64.5in) x 1080mm (42.5in) x 2300mm (90.6in) |
| WEIGHT | 115kg (254lb) |

General Arrangement Drawing

Self-draining safety shower and stainless steel open bowl eye wash within a protective double frame

SD65GLV
SD65GS

