

Product Datasheet


Floor mounted unheated safety shower

18GGLV

18GS

This unheated floor standing emergency safety shower is a popular choice for many indoor applications to protect those workers subject to the risk of exposure to hazardous substances.

Designed to deliver a continuous controlled flow of water that meets the ANSI standard of 76 liters per minute for a complete decontamination. With easy-grip pull rod activation, or optional foot treadle for hands-free operation, this shower can be activated in seconds to minimize injury.

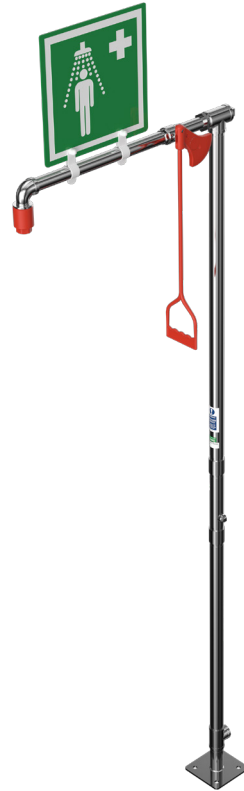

Specifications





MATERIALS OF CONSTRUCTION	
PIPEWORK & FITTINGS	Stainless steel (GS) or galvanised mild steel (G)
OPERATING VALVE	Stainless steel, full bore, stay open valve
SHOWER NOZZLE	Injection moulded nylon 6
SERVICES	
WATER INLET	1¼" female BSP
OPERATING PRESSURE	2 to 6 BAR G / 29 to 87 PSI
MINIMUM FLOW RATES	76 L per minute / 20 US gal per minute
AMBIENT OPERATING TEMPERATURE	
MINIMUM	5C / 41F
MAXIMUM	35C / 95F
OPERATION	
SHOWER	Pull handle
DIMENSIONS & WEIGHT	
DIMENSIONS (WxDxH)	200mm (7.9in) x 782mm (30.8in) x 2320mm (91.3in)
WEIGHT	12kg (26lb)

General Arrangement Drawing

Floor mounted unheated safety shower

18GGLV

18GS

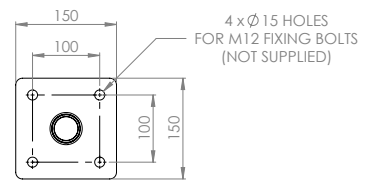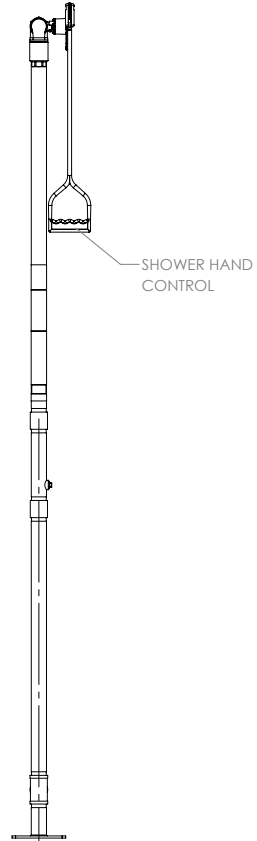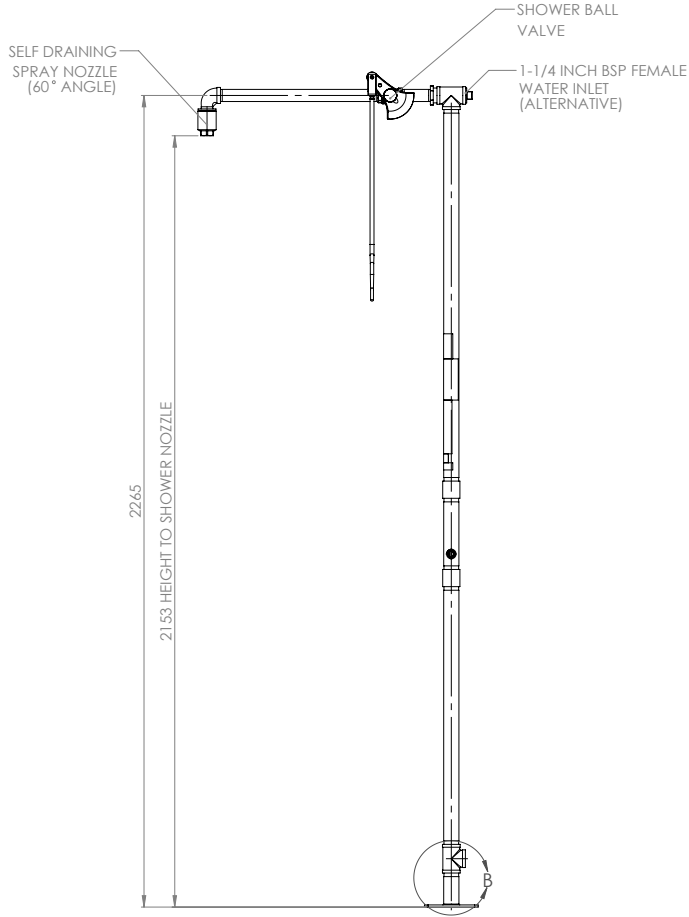

DETAIL A
(FIXING DETAIL)
SCALE 1 : 8